


# AIR CONDITIONING JOBSITE INFORMATION SHEET

1. Circle metering device used.
2. Circle Yes or No at drier locations.
3. Circle service Ports used.
4. Sat. Temp. is pressure converted to Temp.

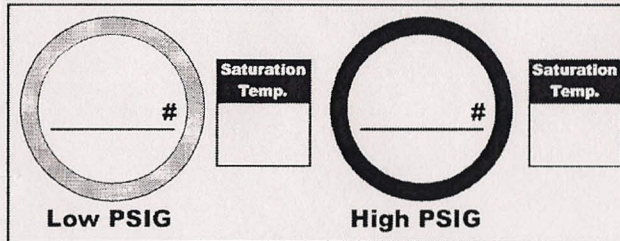


**Formula for Super Heat**

Vapor Line Temp.  
 \_\_\_\_\_  
 Minus Sat Temp.  
 \_\_\_\_\_  
 Equals Super Heat


**Formula for Sub Cooling**

Sat Temp.  
 \_\_\_\_\_  
 Minus Liquid Line Temp.  
 \_\_\_\_\_  
 Equals Sub Cooling

**Inside Temp. Leaving**  
 DB: \_\_\_\_\_  
 WB: \_\_\_\_\_

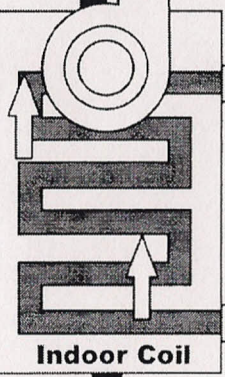


**Inside Temp. Entering**  
 DB: \_\_\_\_\_  
 WB: \_\_\_\_\_

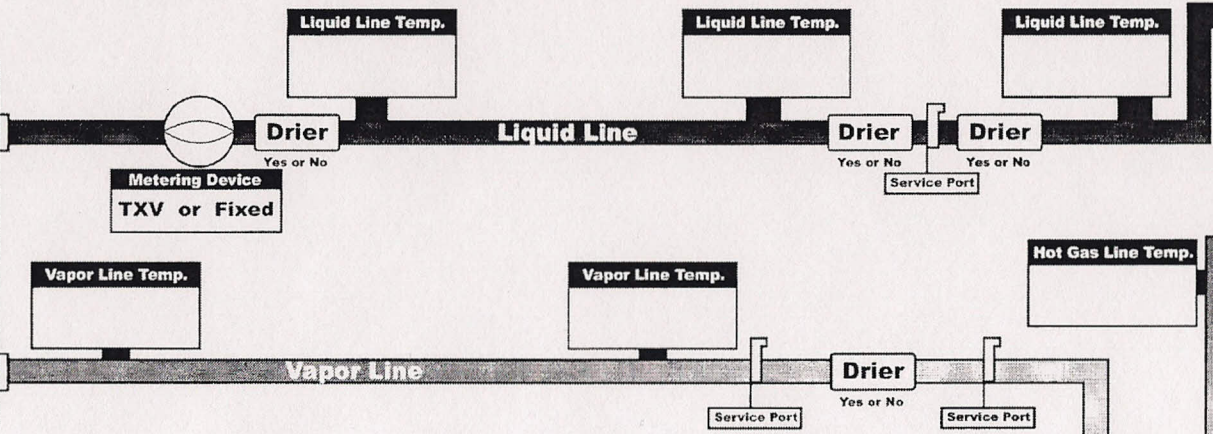

**ADDITIONAL INFORMATION**

1. Liquid Line Size: \_\_\_\_\_
2. Liquid Line Length Vertical/Horizontal: \_\_\_\_\_
3. Vapor Line Size: \_\_\_\_\_
4. Vapor Line Length Vertical/Horizontal: \_\_\_\_\_
5. Vertical Separation Below/Above: \_\_\_\_\_
6. Air Handler CFM: \_\_\_\_\_

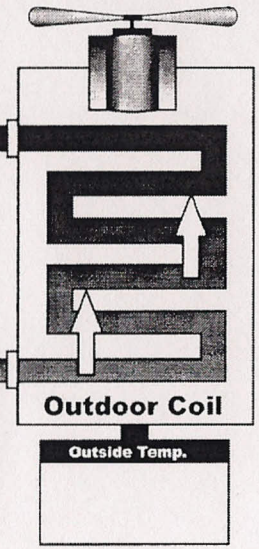

**Compressor**

VOLTS: \_\_\_\_\_  
 AMPS: \_\_\_\_\_  
 C: \_\_\_\_\_  
 S: \_\_\_\_\_  
 R: \_\_\_\_\_

Model # \_\_\_\_\_ External Static Pressure ESP \_\_\_\_\_ Voltage \_\_\_\_\_

Serial # \_\_\_\_\_ Static \_\_\_\_\_ Running \_\_\_\_\_ Locked Rotor (LRV) \_\_\_\_\_